

PXC 310/PXC 310 BT

Enjoy the
Rhythm,
not the Rattle

Outstanding sound quality with optimum protection against ambient noise: with the new models PXC 310 and PXC 310 BT sophisticated travellers are spoiled for choice when it comes to Sennheiser's selection of high quality travel headphones. PXC 310 and PXC 310 BT are high-end collapsible stereo mini-headphones with Sennheiser NoiseGard™ 2.0 active noise compensation and TalkThrough function. Both models are ideal for use on a plane, train, bus or in any other noisy environment.



PXC 310

- High active noise attenuation up to 90%
- Neodymium magnets and duofol diaphragms for excellent sound reproduction
- Collapsible, metal-reinforced headband – improved folding mechanism
- Intelligent, easy-to-use operating/MMI interface
- TalkThrough function
- Optimized for inflight entertainment systems (aircraft adapters included)
- Extensive accessories included: inflight adapters, multi country recharger, rechargeable Lithium-Polymer battery and carrying case.

PXC 310 BT

- Same specifications like PXC 310
- Ideal for use with **Bluetooth®** enabled audio/video
- **Bluetooth®** 2.1 digital wireless transmission technology – recommended Sennheiser BTD 300 BT adapters sold separately
- Supports apt-X®: Sophisticated audio compression technique for true hi-fi quality
- Adapters for audio and iPod connectors also available separately
- Option of using cable as well



PXC 310



PXC 310 BT




apt-x and the apt-x logo are trademarks or registered trademarks of APT Ltd.



The **Bluetooth®** word mark and logo are registered trademarks and are owned by the Bluetooth SIG, Inc.

Specifications

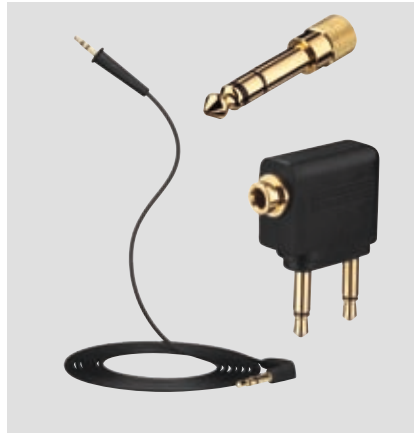

Model	PXC 310	PXC 310 BT
EAN No.	40 44156 02730 2	40 44156 02728 9
UPC No.	6 15104 14016 5	6 15104 14014 1
Cat. No.	502386	502384
Design	high-end collapsible stereo mini-headphones	
Transducer principle	dynamic, closed	
Ear coupling	supra-aural	
Frequency response	15-22,000 Hz	
Nominal impedance active/passive	590/100 Ω	
SPL	107 dB SPL	
THD at 1 kHz	< 0.1%	
Operating time NoiseGard	20 hrs	20 hrs
Operating time Bluetooth®		12 hrs
Operating time Bluetooth® + NoiseGard		8 hrs
NoiseGard active noise compensation	23 dB	
Passive noise attenuation	25 dB	
Weight	105 g	
Cable length		
Audio cable	1.4 m	
Charging cable	1.2 m	
Audio connector	3.5 mm stereo jack plug	
Inflight adapters	3.5 mm double mono jack plug, 6.35 mm stereo jack plug	
Bluetooth®	Version 2.1+ EDR	
Range	up to 10m	
Protocols	A2DP, AVRCP	
Codec	SBC, apt-X	
Packaging		
Design	reclosable window cardboard box	
Packaging dimensions in mm (W x H x D)	190 x 83 x 200 mm	
Master carton dimensions in mm (W x H x D)	455 x 470 x 260 mm	
Units per master carton	10 units	
Languages	German, English, French, Spanish, Italian, Dutch, Portuguese	
Delivery includes	Single-sided audio cable, inflight adapters (3.5 mm double mono jack plug, 6.35 mm stereo jack plug), multi-country charger, rechargeable Lithium-Polymer battery, carrying case, USB charging cable	